



PowerLabDK

Østergaard, Jacob

Publication date:
2013

[Link back to DTU Orbit](#)

Citation (APA):
Østergaard, J. (Author). (2013). PowerLabDK. Sound/Visual production (digital)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.


- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

PowerLabDK

Professor og centerleder
Jacob Østergaard

14. januar 2013

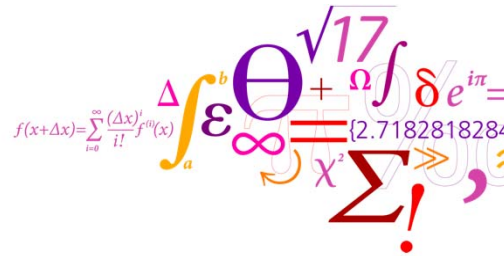


DTU Electrical Engineering
Department of Electrical Engineering

Agenda

1. Introduction to DTU and Center for Electric Power and Energy
2. PowerLabDK faciliteterne
3. Muligheder for F&U
4. Ny rammeaftale om udnyttelse af PowerLabDK's faciliteterne
5. IEEE ISGT Europe 2013
6. Nedbrud Bornholm

History of DTU – a short introduction

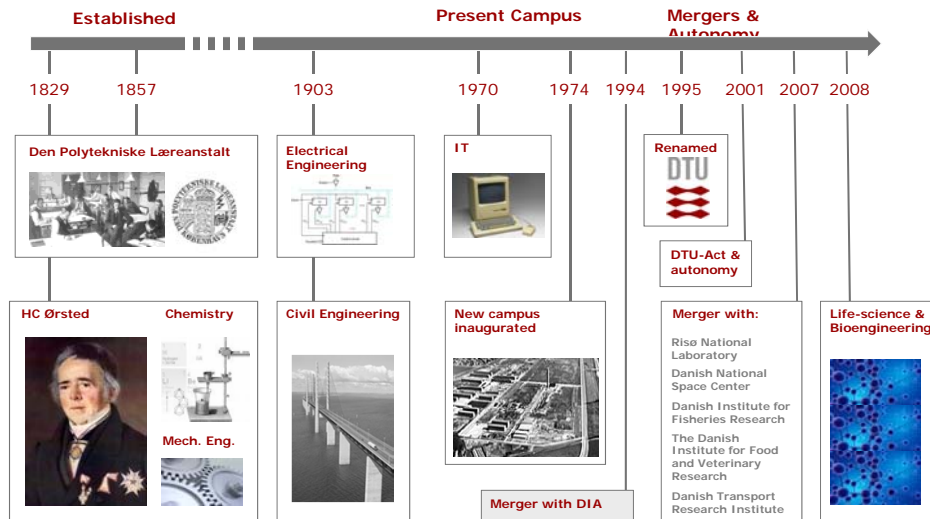

DTU Mission

DTU will develop and create value using the natural sciences and the technical sciences to benefit society



DTU Lyngby Campus



DTU Risø Campus



Scion DTU



DTU Vet/Food/Aqua



DTU Høvsøre/Østerild



DTU DANA



Key figures

Students	7.600
Ph.d.'s	1.300
Staff	5.000
Budget	605 MEuro

Energy Research and Education at DTU

- ~1.000 researchers, including faculty, senior scientists, PhDs and technical staff in energy R&D
- Sustainability, climate and renewable energy technologies are integrated in DTU's portfolio of BSc and MSc programs
- DTU's offers 5 dedicated energy MSc programs
 - Wind Energy
 - Sustainable Energy
 - Petroleum Engineering
 - Nordic Master in Innovative and Sustainable Energy Engineering
 - Erasmus Mundus European Wind Master

Center for Electric Power and Energy (CEE) Department of Electrical Engineering

- CEE established 15 August 2012 as a merger of existing units:
 - Center for Electric Technology, DTU Electrical Engineering
 - Intelligent Energy Systems, Risø National Laboratory for Sustainable Energy
- Main competences
 - Electric Power Engineering
 - Automation and control
 - Information and Communication Technology
- A strong university centers within its field
 - Staff: 85 persons incl. PhD-students
 - Covers discipline oriented research as well as national lab type application-driven research and proof-of-concept
- Strategic partnerships



Strong National and International Collaboration Selected Partners

• Academic partners:



• Commercial and industrial partners:



• Networks:



Center for Electric Power and Energy (CEE) Strategy under development (tentative)

Mission



To provide cutting-edge research, innovation and education within electric power and energy to meet the future needs of society regarding a reliable, cost efficient and environmentally friendly energy system.


Vision




To stand out as a dynamic, open and internationally recognized center of collaborating scientists, students and engineers generating a strong scientific, societal and industrial impact.

Some Main Research Challenges (and The Danish Wind Power Case)

Balancing:



Changed Generation Landscape:

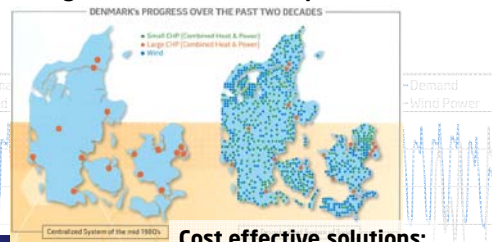

Stability and Reliability:



Cost effective solutions:




Research Groups of CEE

- *Electric Components*
- *Energy Resources, Services and Control*
- *Energy System Operation and Management*
- *Electric Power Systems*
- *Electricity Markets*



Center for Electric Power and Energy Organisation

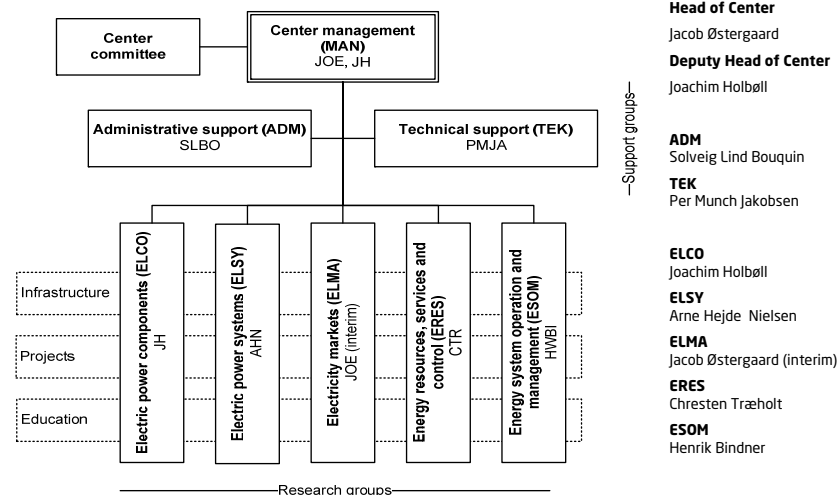

PowerLabDK combines experimental facilities

Flexible multi-purpose laboratories




Lyngby & Ballerup Campus

Large-scale test system



Risø Campus

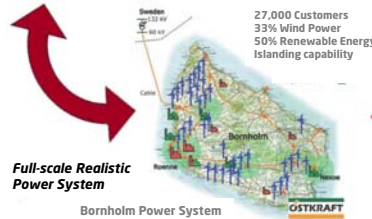

Full-scale Realistic Power System

Stakeholders:



Supported by:



Investment:

18 million Euro

www.powerlab.dk


DTU Technical University of Denmark

INGENIØR HØJSKOLEN KØBENHAVN

University College


OSTKRAFT energi til gode oplevelser

PowerLabDK Organisation

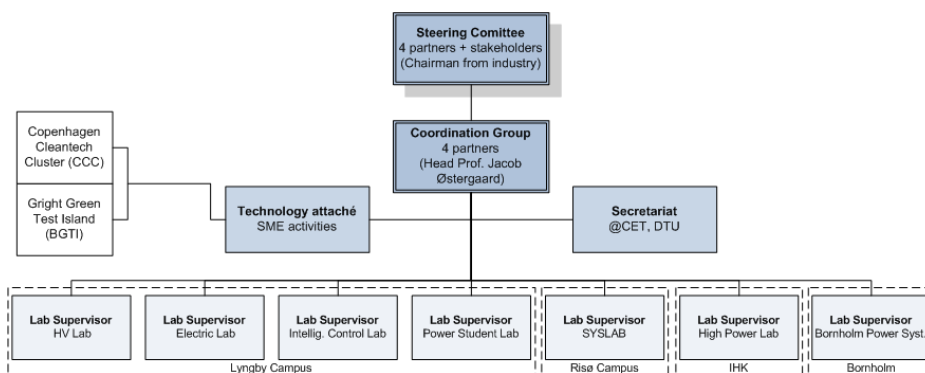

PowerLabDK Concept of Use

Self Service Garage Model

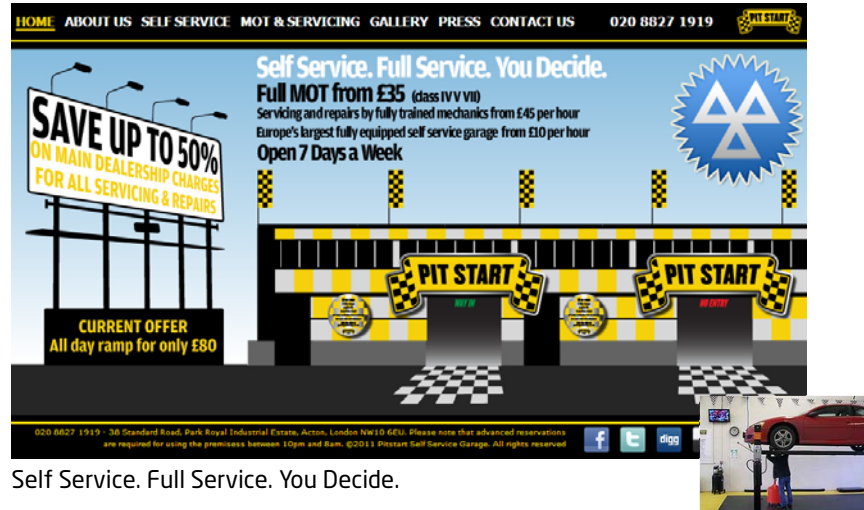

Self Service. Full Service. You Decide.

15 DTU Electrical Engineering, Technical University of Denmark

Presentation name 17/04/2008

Eight PowerLabDK Facilities

From Basis Research to Full-Scale Real-life Experiments

Bornholm Power System	Full-scale laboratory including 27,000 customers, 33% wind power
Electric Lab	Flexible interconnectable lab cells with ICT-infrastructure and central sources
High Power Lab	Continuous high power capability
High Voltage Lab	High voltage and high current generators
Intelligent Control Lab	SCADA-systems, control room, real-time simulator, supercomputer
Power Student Lab	Experimental facilities for teaching and education
SYSLAB	Renewable energy technologies, distributed ICT and control platform
Power Flex Houses	Flexible energy demand, building automation

All is tied together by ICT, SCADA etc.

16 DTU Electrical Engineering, Technical University of Denmark

Presentation name 17/04/2008

PowerLabDK 

Intelligent Control Lab

Power system simulation, control and supervision



www.powerlab.dk 

DTU Technical University of Denmark

INGENIØR HØJSKOLEN KØBENHAVN University College

ØSTKRAFT energi til gode oplevelser



Real-Time Digital Simulator Facility (Phase 1)

- 40 CPU cores: 20 GPC-card (each 2xIBM Processor), 110+ buses
- Typical simulation time step 50 μ s (time step can be down to a few μ s depending on the network complexity)
- 1 x GTNET-card
 - IEC61850 standard / IEC61850-9-2 sampled values
 - Playback from PC hard drive
 - SCADA-interface (DNP3 slave)
 - 1024 binary simulation status points (i.e. breaker position)
 - 512 binary simulation control points (i.e. breaker commands)
 - 500 analogue status points (i.e. output from RTDS)
 - 100 analogue control (i.e. input to RTDS)
- I/O-cards
 - 3 x GTAO-card (3x12 analogue outputs ± 10 V)
 - 3 x GTAI-card (3x12 analogue inputs ± 10 V)
 - 3 x GTDI-card (3x64 digital inputs channels)
 - 3 x GTDO-card (3x64 digital output channels)
 - 3 x 16 dry contact outputs (0-250 Vdc)
- GPS-clock
- Programming
 - GUI-based RSCAD
 - Standard power component library, generator control library, control library, automation and protection library, and small time power component library for control study of power electronics
 - Cbuilder - User defined models, based on C Language
 - Import study case from PSS/E



Real-time Digital Simulator

- A highly specialized digital computer dedicated for real time dynamic simulation of power systems and interaction with external hardware
- Application
 - Analysis of transmission and distribution networks
 - Protective relay and control system testing (hardware-in-loop)
 - Operator training and control room solutions (operator-in-loop)
 - Power equipment test under realistic grid conditions (power hardware-in-the-loop)
 - IEC 61850 tests
 - Integrated experiments with operator, control room, simulated grid, physical controllers and power equipment in the lab



Control Room

- *Full-scale power system control room for development of applications without disturbing real customers.*
- Application
 - Power system operation
 - Operator training
 - SCADA and EMS applications
 - Human-machine interface
 - Data collection from field
 - Supervision and control of experiments



Communication Network PowerLabDK @ DTU Lyngby Campus

- Four communication networks
 - *Staff network*: Main network with all resources
 - *Student network*: Network with main resources
 - *SCADA network*: Closed with no user access
 - *Extra network*: For special experiments
- Fiber communication lines
 - Provide “unlimited” bandwidth
 - Avoid EMC problems
- Main fiber cross-field with eight 48-port fiber switches
- End points with 1 Gbit 4-port fiber-to-PDS switches and raw fibers
 - 5 fiber pairs + 4 switches in each of 21 LabCell Boards
 - 1 fiber pair + 1 switches in each of ~50 wall sockets stations
 - In total 200 fibers + ~150 switches



Modular Blade Server Infrastructure

- *Flexible computer facility for computational heavy experiments which can be accessed locally and remotely; consisting of two IBM Blade centers with in total 36 quad-core CPU's and 856 GB RAM memory*
- Application
 - Electricity market simulation
 - EV fleet management systems
 - Virtual power plant development and test
 - Power system analysis
 - Data collection and processing from field
 - Control room applications




Electric Lab

Power and energy technologies
for the intelligent grid




LabCell Board Design

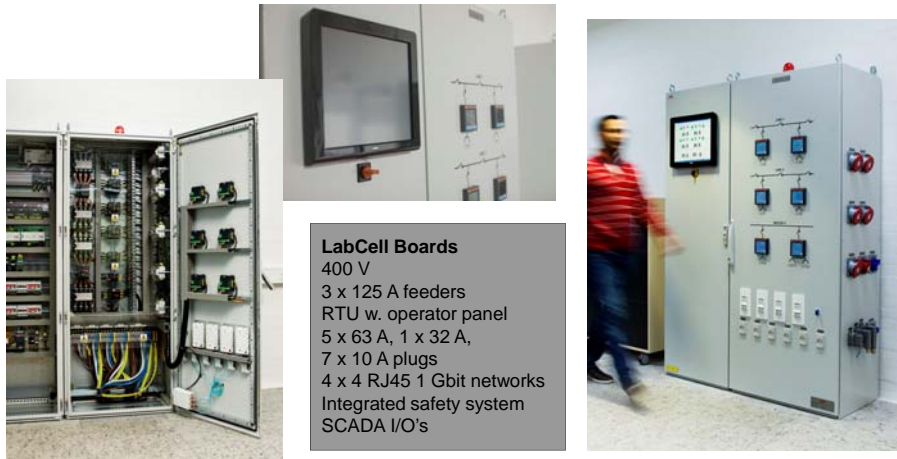

LabCell Boards
 400 V
 3 x 125 A feeders
 RTU w. operator panel
 5 x 63 A, 1 x 32 A,
 7 x 10 A plugs
 4 x 4 RJ45 1 Gbit networks
 Integrated safety system
 SCADA I/O's

LabGrid PowerLabDK @ DTU Lyngby Campus

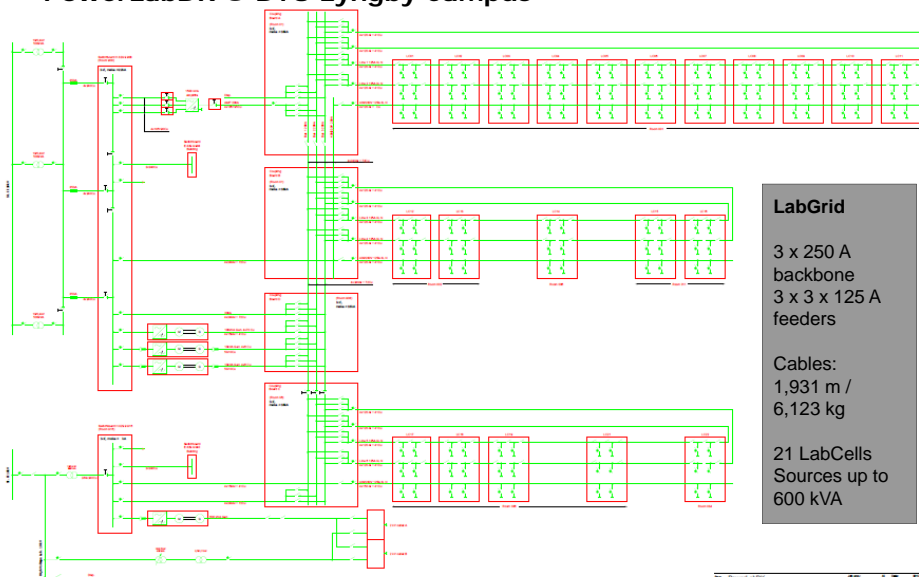

LabGrid

3 x 250 A
 backbone
 3 x 3 x 125 A
 feeders

Cables:
 1,931 m /
 6,123 kg

21 LabCells
 Sources up to
 600 kVA





150 kW (1.2 MW) Four Quadrant Three Phase Analog Amplifier



- Manufacturer: Spitzenberger & Spies, Viechtach, Germany
- Frequency range: DC to 5 kHz (-3 dB), 50 kHz for small signal
- Slew rate: $> 52 \text{ V}/\mu\text{s}$
- AC voltage ranges: 56 V, 135 V, 240 V, 270 V
- DC voltage ranges: 79 V, 191 V, 339 V, 382 V
- AC 24 hour output power: 150 kW
- AC 1 hour output power: 200 kW
- AC 5 min output power: 300 kW
- DC 24 hour output power: 50 kW per phase
- DC 1 hour output power: 75 kW per phase
- AC+DC 3 ms pulse output power: 400 kW per phase
- Power sink capability AC: 42 kW (1 hour - 90 kW)
- Power sink capability DC: 17 kW per phase
- Power sink capability AC+DC for 3 ms pulse: 80 kW per phase




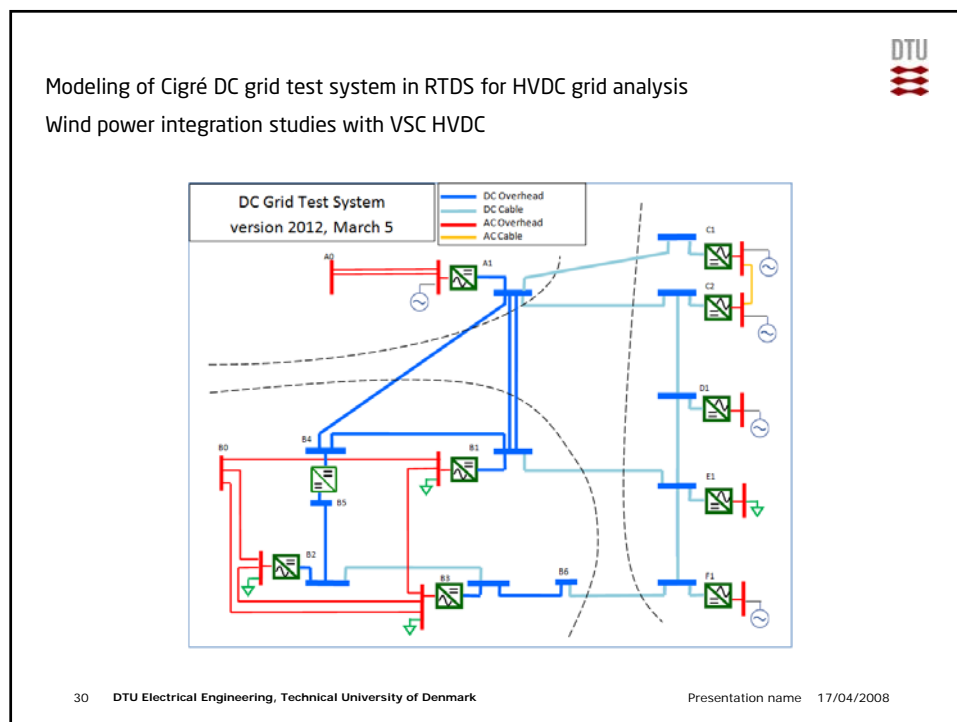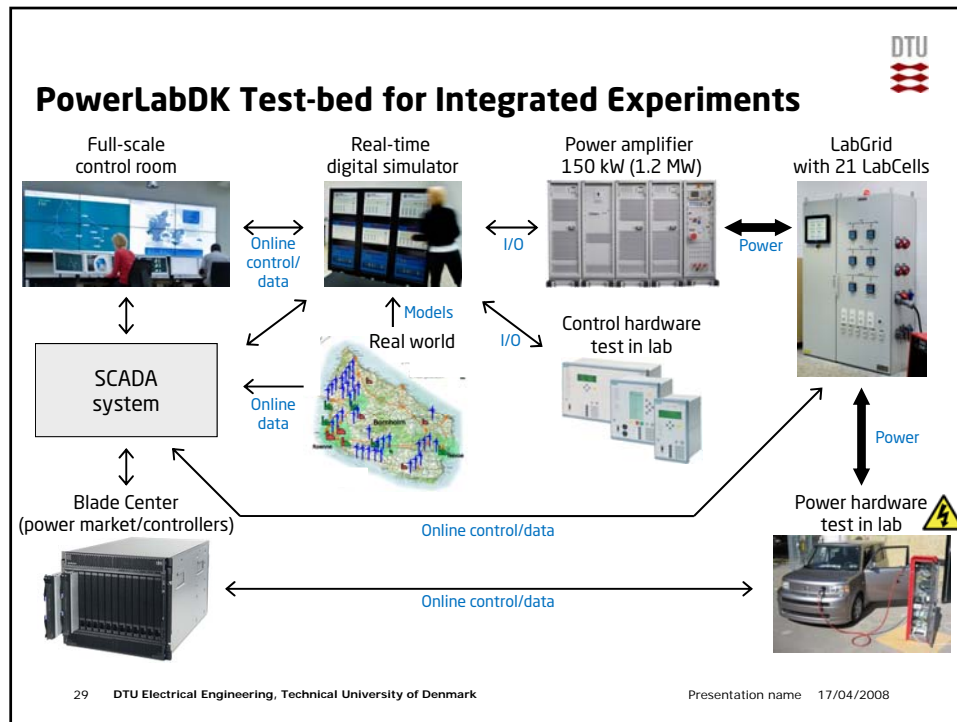

Modeling of the Western Danish Power System in RTDS and area control with high wind power penetration.




Time series of wind power production data will be very relevant.

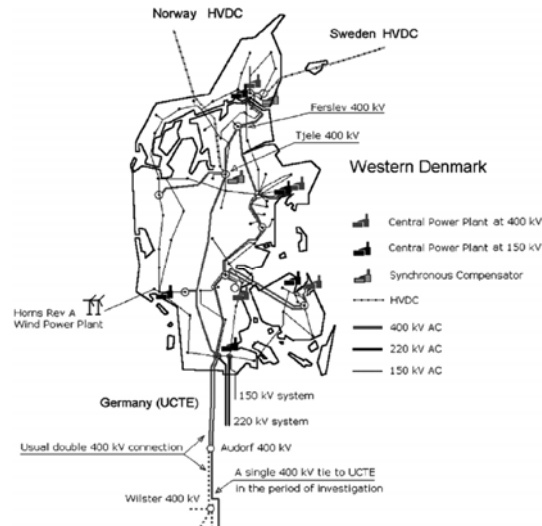

Electricity market design in the future renewable-based systems




• Today:

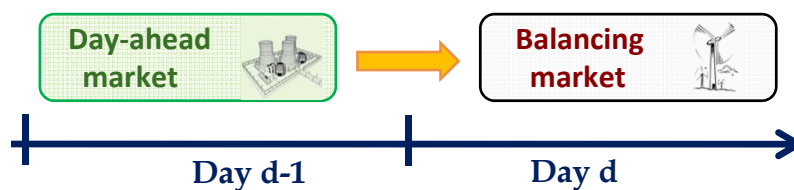


• In the renewable-based energy system in 2050...


- Need for a real-time market?
- Market coordination level?
- Incentives to invest in renewable generation?




PowerLabDK 

High Voltage, High Power and Student Labs

Components in interaction
with complex energy systems



www.powerlab.dk 

 Technical University of Denmark   ØSTKRAFT
energi til gode oplevelser

PowerLabDK 

SYSLAB and PowerFlexHouse

Intelligent distributed
energy system in practice



www.powerlab.dk 


 Technical University of Denmark   ØSTKRAFT
energi til gode oplevelser

SYSLAB @ Risø Campus



- A platform for DER research and testing
- Flexible experimental setup up
- Several RES units
- Embedded computing power and flexible communication
- Very flexible control possibilities

Bornholm Full-Scale Laboratory – 1% of DK 33% Wind Power Penetration; 28,000 Customers

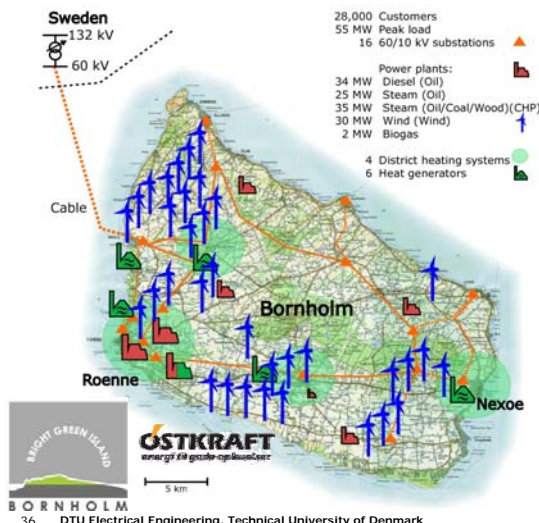

Energy strategy
Political & public drive

BORNHOLM.DK
BRIGHT GREEN ISLAND

Energy resources:

- Customers
- Wind power
- Biogas plant
- Combined heat and power
- District heating
- Solar power plants
- eMobility

Features:

- Nord Pool market (DK2)
- Islanding capability

Supervision and Measurements Systems covering Bornholm


- **Control rooms with SCADA systems**
 - Operational ABB NM SCADA at Østkraft
 - Experimental ABB NM SCADA at DTU
 - Measurements collected with 1 s time resolution
 - 1,300 analogue signals 2,200 digital signals
- **ELSPEC G4430 BLACKBOX Power Quality Recorders**
 - All network parameters with up to 1,024/cycle resolution
 - 10 units in the grid + 7 units in the power plant
- **Phasor measurement units (PMU's)**
 - Voltage and current RMS + phase with 20 ms time resolution
 - Extremely accurate time stamping
- **Interval meters at customers**
 - Advanced 5 min interval meters
- **Forecasting systems**
 - Wind power generation, PV generation, electricity demand, heat demand



37 DTU Electrical Engineering, Technical University of Denmark

Presentation name 17/04/2008

Bornholm Island Operation 17 September 2009

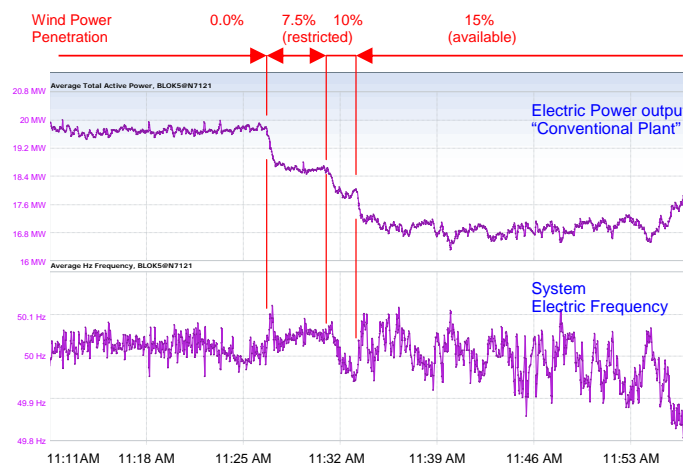


38 DTU Electrical Engineering, Technical University of Denmark

Presentation name 17/04/2008

Presentation name 17/

Bornholm Event December 25, 2012

1 ms Resolution Data

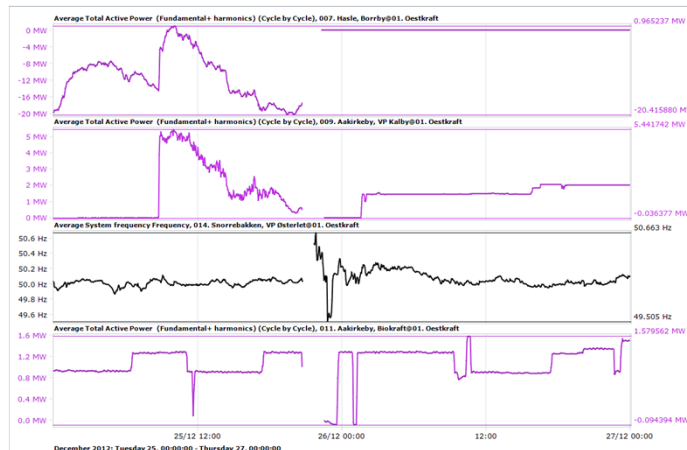

Energinet.dk rammeaftale om udnyttelse af PowerLabDK

- Overordnede mål er at fastlægge rammerne for fremtidige samarbejde om udnyttelse af PowerLabDK's faciliteter
- Årlig ramme på 650-700.000 kr
 - Dækker brug af udstyr og lønninger
 - Der kan aftales yderligere aktiviteter
- Der aftales løbende årsplaner
- NDA for udveksling af data er indeholdt
- Årsplan 2013
 1. Opsætning af RTDS/SCADA/kontrolrum simuleringsplatform
 2. Implementering af modelnet
 3. RTDS-simulering med DER, fx PV og aktiv kontrol (der træffes nærmere aftale om dette)
 4. Plan for kommende års aktiviteter og analyser



Jacob Østergaard

Professor, Head of Centre
Centre for Electric Technology (CET)
Department of Electrical Engineering, DTU
Tel: +45 45 25 35 01
Email: joe@elektro.dtu.dk
www.staff.dtu.dk/jaos